

Cloverdale Paint

S T A I N A N D W O O D C A R E

A RICH EXTERIOR SATIN WOOD FINISH FOR USE ON DOORS, RAILINGS, EAVES & TRIM, WOOD & LOG SIDINGS, AND HOT TUB SURROUNDS.



#43606

EXTERIOR

ALKYD BASE

SATIN WOOD FINISH

SUNFAST WOOD FINISH #43606

Sunfast Exterior Satin Wood Finish provides beauty and protection on all exterior woods while maintaining a rich natural look.

BEAUTY! PROTECTION! PERFORMANCE!

Sunfast is a clear amber sealer / topcoat which provides a rich low lustre finish which protects and increases the beauty of natural wood.

Sunfast enhances wood grains and natural tones on exterior vertical wood surfaces. Apply to:

- Natural Wood Siding
- Log Siding
- Garage Doors
- Entry Doors
- Wood Eaves & Trim
- Wood Railings
- Hot Tub Surrounds
- Garden Furniture

Sunfast is formulated with flexible alkyd resins and penetrating iron oxide pigments which provide outstanding protection against cracking, peeling, the effects of weathering and resistance to the damaging ultra violet rays from the sun. Sunfast contains organic fungicide and micro-crystalline waxes to resist mildew and features excellent water repellency characteristics.

Note: All exterior clear coat systems perform best when the moisture content of the wood is low.

Sunfast is recommended on wood and log siding where the moisture content is less than 20%. Sunfast is not recommended on decks, other large horizontal or walking surfaces or wood substrates with continuous water immersion.

FOR BEST RESULTS

Apply Sunfast to clean dry wood with a brush working the material into all areas of the wood surface and insuring a good seal. The first sealer coat may be thinned up to 10% with mineral spirits and spread at a rate of 350 sq. feet (33 sq. M) per 3.78 litre container or 88 sq. feet (8 sq. M) per 945 ml container.


Additional coats should be applied at 450 sq. feet (42 sq. M) per 3.78 litre container or 112 sq. feet (10 sq. M) per 945 ml container.

Sunfast requires a minimum of 2 coats. Applying 3 coats will greatly increase the lasting protection and rich natural lustre to the finish.

DRY TIMES

Sunfast is dry to touch in 6 hours but requires 24 hours between coats.

See the label for additional application information

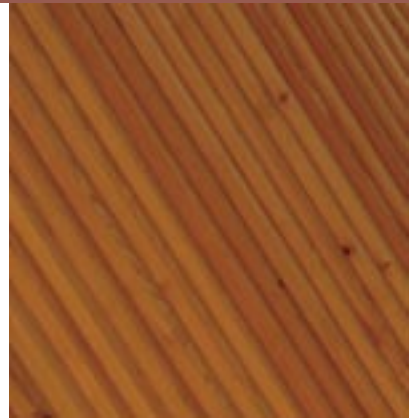

Cloverdale Paint
stores and
authorized
dealers

